

EC52

MAINTENANCE SCHEDULE

The EC52 Escalator Cleaner is a machine designed to clean escalators and moving walkways (horizontal and inclined). In these specific applications it is not always necessary to operate the machine on a daily basis, we therefore recommend that the maintenance checks listed here below are carried out at the end of each use.



DAILY CHECKLIST



1. Take the machine to a suitable area for the disposal of waste water, where there is a socket available to plug in the machine.



2. Activate the brake.



3. Unclip the drain hose.



4. Remove the drain hose cap and empty the recovery tank. Replace the cap and clip the hose back into position.




5. Prepare the brush washing tray, fill it with water up to the level indicated by the bars in the base of the tray.



6. Wash the brush head and the brushes (both PPL and Tynex) using the tray.



7. Activate the vacuum motor. The water picked up from the tray will clean the vacuum channel.

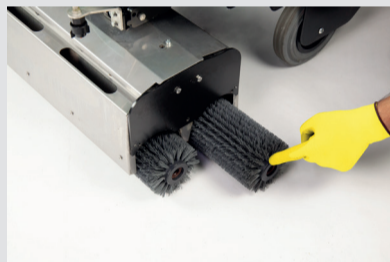

8. Remove the brushes and verify that both sets are in good condition. If too worn replace them.



9. Empty and rinse out the recovery tank.



10. Check that the gaskets in the tank lid are in good condition.



11. Clean the vacuum filter.



12. Empty and rinse out the solution tank.



13. Clean the solution filter.




14. Remove and clean the solution spray nozzles.




15. Clean the accessories, if used (TOP version only).



16. If the internal debris vacuum system has been used, substitute the paper bag.

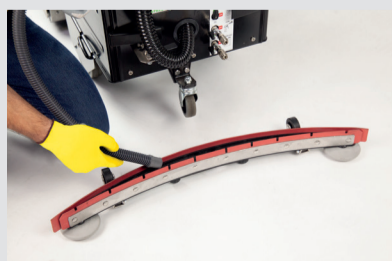

17. If the squeegee has been used, clean it and check the blades for wear (TOP version only).

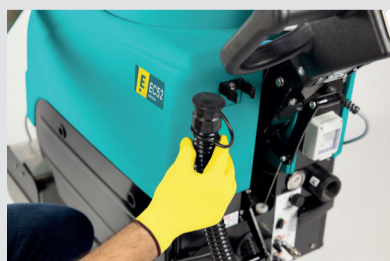

18. Check that the vacuum hose and drain hose are intact.

If any of these parts are worn or damaged, replace them or contact technical assistance.

